


tecniwell



TW 100-E 30 kW

ELECTRIC HIGH FLOW TRIPLEX PUMP



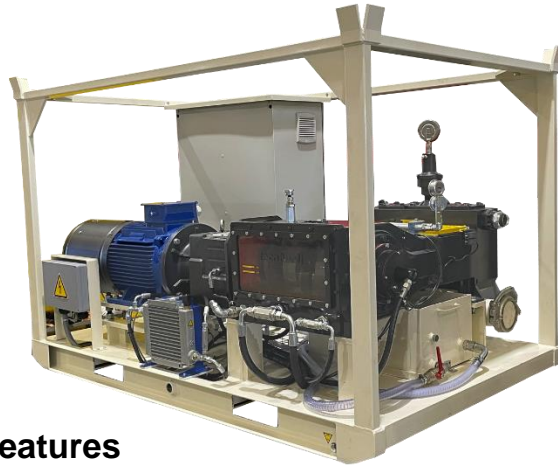

Technical Features

Variable frequency drive (VFD) / entraînement à fréquence variable / Frequenzumrichter	From 5Hz to 75Hz	
Electric motor / moteur électrique / Elektromotor	30 kW	41 HP
Max pressure / pression maximale / maximaler Druck	3,5 MPa	35 bar 500 psi
Max flow rate / débit maximale / maximale Durchflussrate	800 lt/min	211 gpm
Piston diameter / diamètre du piston / Kolbendurchmesser	4"1/2 - 114,3mm	
Stroke / Course / Hubweg	4" - 101,6 mm	
Maximum stroke rate / coup par minute / max Hub pro Minute	260 / min	260 spm
Suction diameter / diamètre d'aspiration / Saugdurchmesser	3"	76,2 mm
Output diameter / diamètre de sortie / Ausgangsdurchmesser	2"	50,8 mm


STACKABLE FRAME

Bareshaft dimensions and weight

Width 615 mm - 2'	Height 450 mm - 1'5"	Lenght 1100 mm - 3'7"	Weight 900 Kg - 1984 lb
-------------------	----------------------	-----------------------	-------------------------

Frame dimensions and weight

Width 1400 mm - 4'7"	Lenght 1900 mm - 6'3"	Height 1300 mm - 4'3"	Weight 2100 Kg - 4629 lb
----------------------	-----------------------	-----------------------	--------------------------

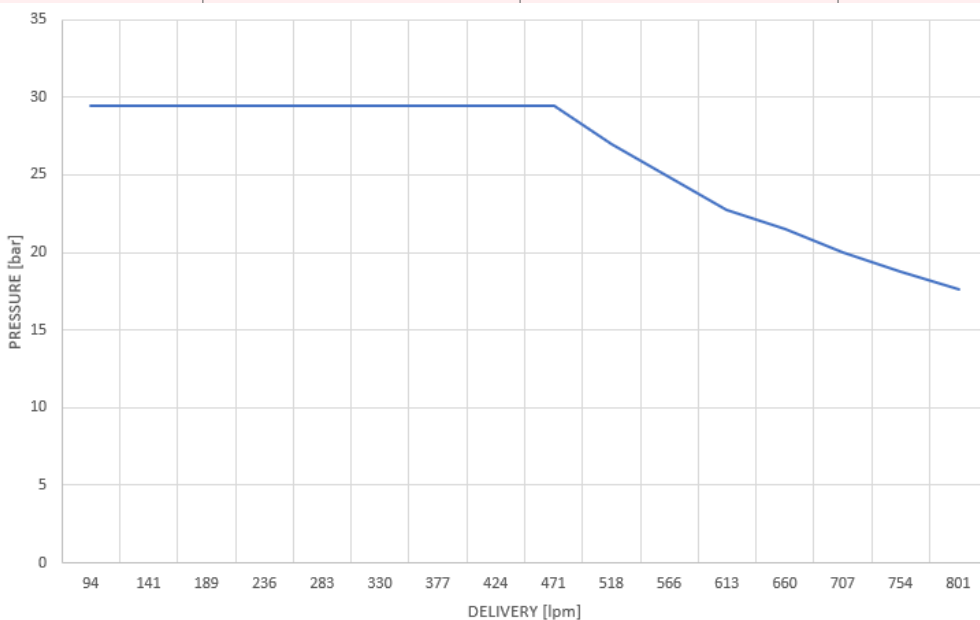

tecniiwell

Via 1° Maggio, 35 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
 e-mail: info@tecniiwell.com – www.tecniiwell.it

Data are indicative and subject to change without notice, the version shown may have particular features or options not included in the standard model

